



CASE STUDIES

- CLIENT**

SECTOR

SERVICES

FINISH
- ➔

➔


➔

➔
- Joseph Gallagher

Car Parking

Industrial Resin Flooring

Car Park Decking

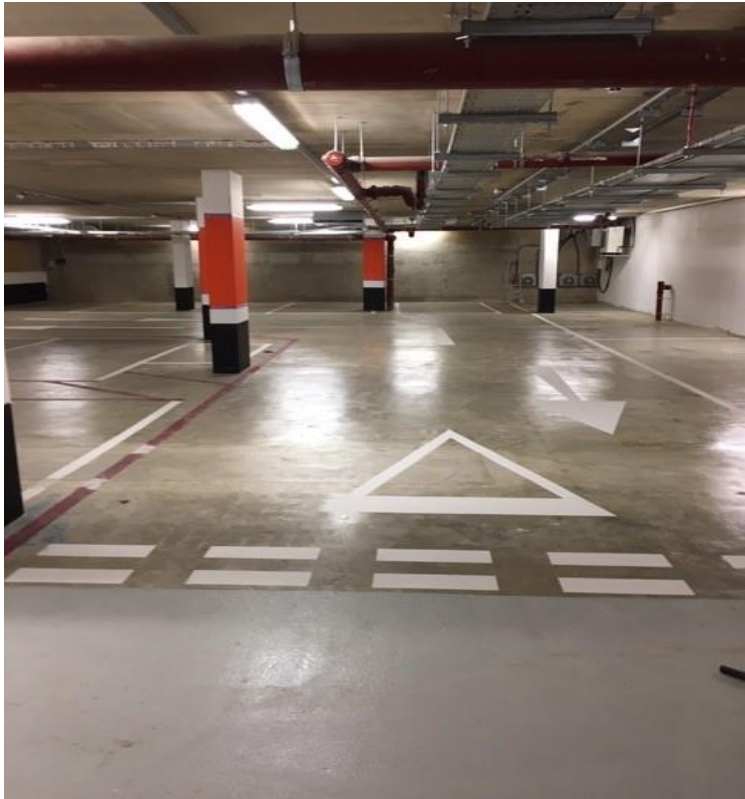

PROJECT
Following on from a number of successful contract with Joseph Gallagher Performance Flooring were appointed to complete Dickens Yard underground car park in Ealing, London.

The project was a parking facility for a high end mixed use facility. The contract value was around £150K.

CHALLENGE
Performance carried out a full site survey, worked in collaboration with Sika to devise the specification and put a proposal together to complete the works within an operational car park.

There were numerous repairs required to the existing car park decking that had been carried out by others some time ago.

The logistics of working around an operational car park and handling the disruption meant some of the works were performed out of hours and on night shift to lessen the impact to car park users.

SOLUTION
Performance flooring carried out captive shot-blasting to the concrete slab and used plainer and diamond grinders to remove existing coatings were required.

SikaFloor EB 24.14 rapid system was installed to the deck to give a hard wearing slip resistant covering. The rapid top coat was used due to low temperatures and risk of “blooming” to the coloured areas.

Line markings were then carried out using Sika Cor EG5.

The project was completed to a very high standard within the programme which has let to further contracts being awarded by the same client.

